

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 March 2001 (15.03.2001)


PCT

(10) International Publication Number
WO 01/17918 A1

- (51) International Patent Classification⁷: C03B 37/014, 19/14
- (72) Inventor; and
(75) Inventor/Applicant (for US only): SARKAR, Arnab [IS/US]; 6715 Daryn Drive, West Hills, CA 91307 (US).
- (21) International Application Number: PCT/US00/24456
- (22) International Filing Date:
1 September 2000 (01.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/152,293 3 September 1999 (03.09.1999) US
- (81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (71) Applicant (for all designated States except US): BULAR, LLC [US/US]; 6715 Daryn Drive, West Hills, CA 91307 (US).
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: APPARATUS FOR MAKING A GLASS PREFORM BY FLAME HYDROLYSIS

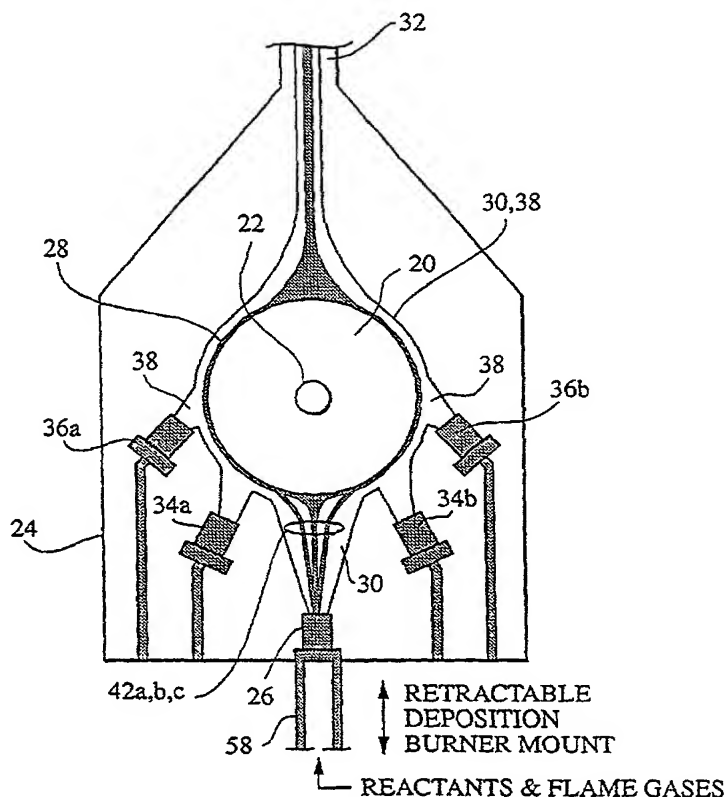

(57) Abstract: An apparatus is described, for making a glass preform by flame hydrolysis. The apparatus includes a main deposition burner configured to direct two or more streams of soot-forming reactants and a stream of flame gases into a deposition chamber, in a direction toward a rotating support mandrel, so as to form by flame hydrolysis a glass preform on the mandrel. One or more pairs of auxiliary burners may also be included, for introducing further streams of flame gases, but no streams of soot-forming reactants, toward the glass preform, from opposite lateral sides of the main deposition burner; to provide additional heat when the preform has reached a predetermined size, thereby improving efficiency. The main deposition burner is configured to direct the two or more of the streams of soot-forming reactants to impinge quasi-tangentially toward the mandrel and, further, to direct the stream of flame gases obliquely inwardly toward the two or more streams of soot-forming reactants, to narrow the flame's width along one or both of two orthogonal axes.

WO 01/17918 A1

2003103-01002